
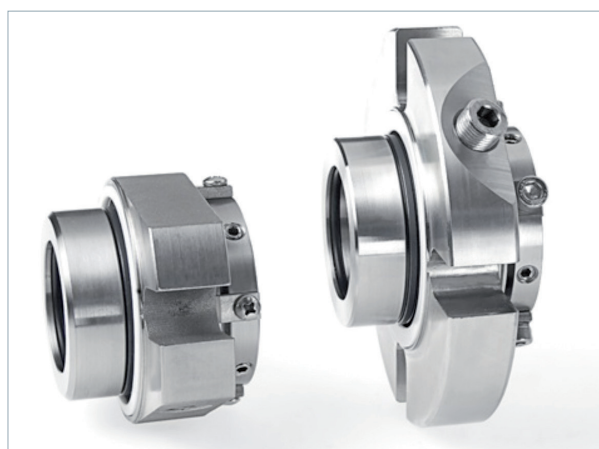


CIERRES DE CARTUCHO

GIROSEAL TIPO "A" y "B" SENCILLO

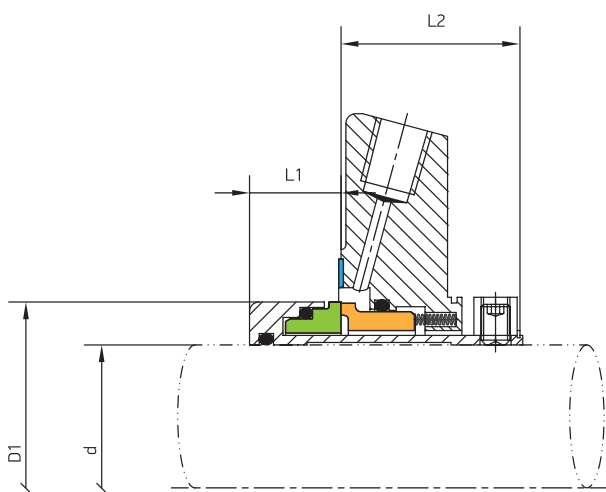

d		D1	D2	L1	L2	a	s
mm	inch						
24	***	43.5	104	19.1	38	62	12.5
25	1.000	43.5	104	19.1	38	62	12.5
28	1.125	46.0	104	19.1	38	62	12.5
30	***	48.0	104	19.1	38	65	12.5
32	1.250	50.0	104	19.1	38	67	12.5
33	***	50.0	104	19.1	38	67	12.5
35	1.375	53.0	115	19.1	38	70	12.5
38	1.500	56.0	125	19.1	38	75	14.8
40	1.625	58.0	125	19.1	38	75	14.8
43	***	61.0	133	19.1	38	80	14.8
45	1.750	63.0	140	19.1	38	81	14.8
48	1.875	66.0	140	19.1	38	84	14.8
50	2.000	68.0	140	19.1	38	87	14.8
53	2.125	72.0	150	19.1	38	90	17.6
55	1.250	73.0	150	19.1	38	92	17.6
60	2.375	78.0	160	19.1	38	100	17.6
***	2.500	81,5	165	19.1	38	105	17.6
65	2.625	83.0	165	19.1	38	105	17.6
70	2.750	88.0	180	19.1	38	118	17.6
***	2.875	97.0	190	19.1	38	123	17.6
75	3.000	100.0	190	19.1	38	125	17.6
80	3.125	105.0	190	19.1	38	130	17.6
***	3.250	107.0	220	19.1	38	133	20.6
85	3.375	110.0	220	19.1	38	135	20.6
90	3.500	115.0	220	19.1	38	140	20.6
***	3.625	117.0	220	19.1	38	142	20.6
95	3.750	120.0	220	19.1	38	145	20.6
100	4.000	125.0	220	19.1	38	150	20.6

PARÁMETROS DE TRABAJO

- Presión: 25 kg/cm²
- Temperatura: -200°C+260°C
- Velocidad: 35 m/s

MATERIALES

- Caras de roce: Grafito, Silicio, Tungsteno
- Juntas tóricas: Buna, EPDM, FEP, FFKM, HNBR, Neopreno, PTFE y Vitón
- Muelles y otros: Inox, Titanio, Hastelloy....

